



# INTRODUCING PLI 's FLUSH MOUNT PRE-HUNG DOOR JAMBS



ROUTERED BOX  
(INCLUDED)



OPTIONAL THROUGH BOX  
SOLD SEPARATELY  
(1.75 DOORS BY OTHERS)



TYP ELEVATOR HOISTWAY

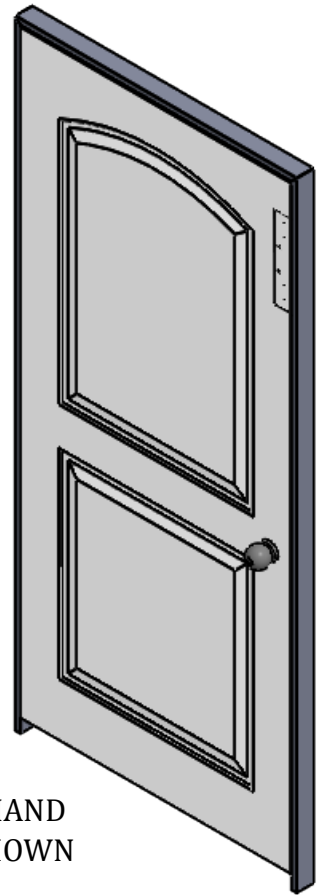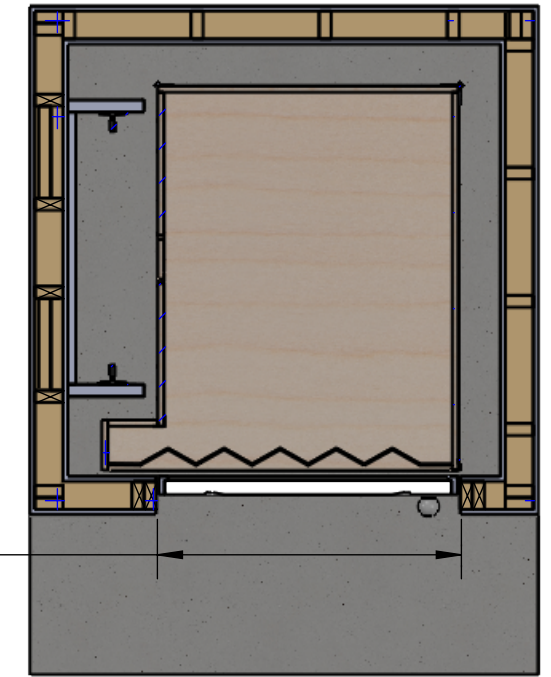


RIGHT HAND  
DOOR SHOWN


## STANDARD PANEL DESIGNS (PRICES MAY VARY)




FLAT

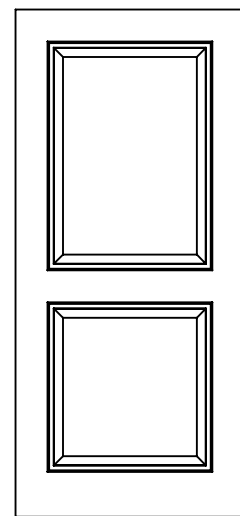


2 PANEL  
SQUARE

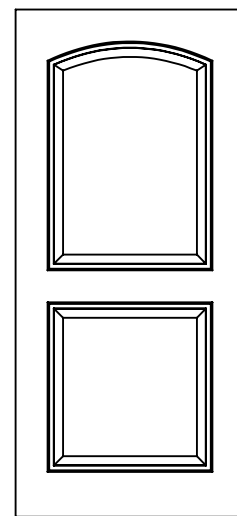

2 PANEL  
ROUND

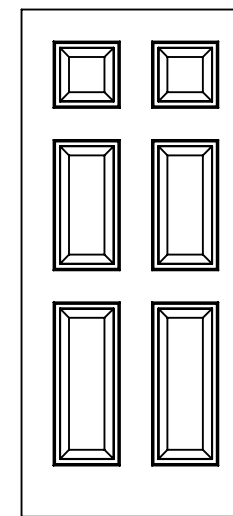

6 PANEL



SHAKER  
(INTERIOR ONLY)


R/O FRAMING WIDTH

FINISHED DOOR SIZE		R/O FRAMING WIDTH	R/O FRAMING HEIGHT
2'6"x6'8"	32"x80"	34"	82 1/2"
3'0"x6'8"	36x80	38"	82 1/2"
2'6"x7'0"	32x84	34"	86 1/2"
3'0"x7'0"	36x84	38"	86 1/2"
2'6"x8'0"	32x96	34"	98 1/2"
3'0"x8'0"	36x96	38"	98 1/2"

### Highlights:

- Typical jamb familiar to most builders, carpenters, framers
- No strike plates will be visible from the landing/hallway allowing the door to blend in
- Available in 5 different panel designs with standard white primer
- Available in most standard door sizes including: 2'8"/3'0" x 6'8", 2'8"/3'0" x 7'0", and 2'8"/3'0" x 8'0"
- Interior and Exterior doors available
- 1-3/4" Solid Core Door Design
- Routed and prepped for Honeywell Reli-align door locks
- Includes: routed box to secure door lock keeper, spring ball catch, flush mount interior pull tab
- Standard Interior hardware finish is satin nickel
- Standard Exterior hardware finish is stainless
- Optional Bronze hardware finish available
- Door Knob(s) Not Included
- When properly mounted, the back of door to hoistway is no greater than 3/4" to comply with ASME 17.1-2016

TYP HONEYWELL RELIALIGN  
DOOR LOCK

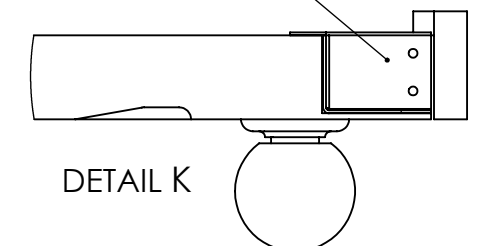

AUG 2020

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PRECISION LIFT INDUSTRIES, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PRECISION LIFT INDUSTRIES, LLC IS PROHIBITED.

